



## SVCS-1

- Single Zone 2Amp or 2-10Amp 24Vdc Control .
- When installed correctly are compliant with EN12101-10.
- 72 hour battery back up on mains failure.
- Sealed lead acid batteries.
- Auto shut down to protect batteries (open vents to fail safe conditions first).
- Relay to provide volt free fault indication (when not used for auto-reset feature).
- Open circuit cable detects power supply failures, removal of batteries etc (code fault signal).
- Auto-test – Front of panel keyswitch enables testing and opening and closing of all actuators/vents connected.
- Facility for smoke heads to be automatically reset.
- Multi-Zone versions available by special order.

### Inputs for:

- Fire alarm signal
- Break glass call points
- Smoke detectors
- Heat detectors
- Fireman's override switch
- Thermostat (subject to special order)
- Rain sensor (subject to special order)
- Wind sensor (subject to special order)




## Technical Specification

Voltage (input)	230V ac
Voltage (output)	24V dc
Output Current	2A/10A
Protection Class	IP44
Colours Available	Grey

## Additional Information

Dimensions

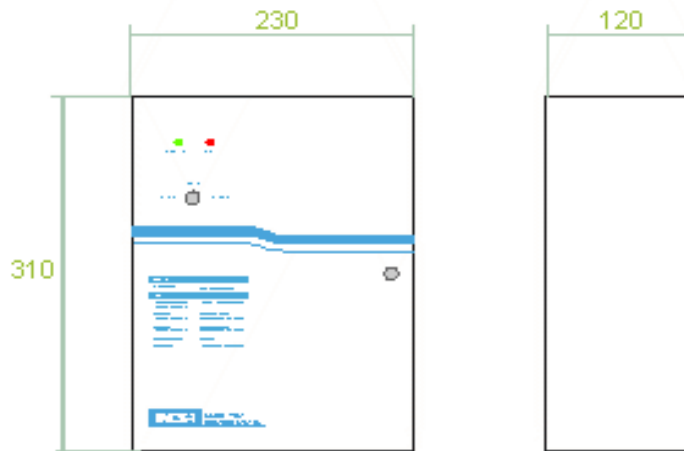

## Optional Inputs



Fireman's Override



Fireman's Override (key)



Break Glass Call-Point)



Smoke Detector



Fire Alarm signal

